


SUPERPARLED ECO

User Manual / Instrucciones de Usuario


Rev 14.02.01

Please read this manual carefully before operating the LED light.



UP DOWN INC DEC

● LED DISPLAY FUNCTIONS

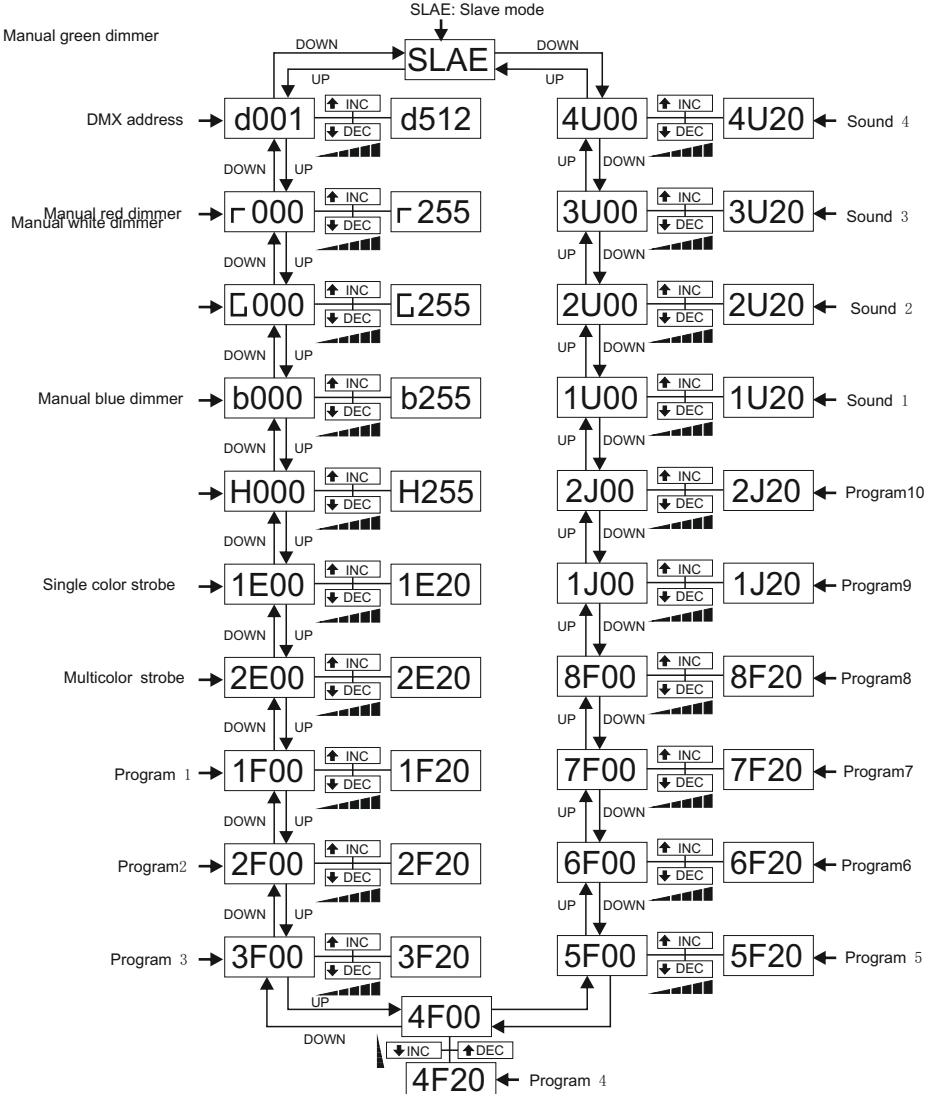

● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	Manual red dimmer 0-100%
2	0-255	Manual green dimmer 0-100%
3	0-255	Manual blue dimmer 0-100%
4	0-255	Manual white dimmer 0-100%
5	0-255	Control the speed and strobe
6	0-255	0-16 no function, 17-255 choose the color. (Channel 1-4 will not work in this mode. Channel 5 control the speed)
7	0-255	1-13 program 1, 14-27 program 2, 28-41 program 3, 42-55 program 4, 56-69 program 5, 70-83 program 6, 84-97 program 7, 98-111 program 8, 112-125 program 9, 126-139 program 10, 140-153 program 11, 154-167 program 12, 168-181 program 13, 182-195 program 14, 196-209 program 15, 210-223 program 16, 224-237 program 17, 238-251 program 18, 252-255 program 19 (Channel 1, 2, 3, 4, 6 will not work in this mode. Channel 5 control the speed)
8	0-255	1-18 program 20, 19-37 program 21, 38-56 program 22, 57-75 program 23, 76-94 program 24, 95-113 program 25, 114-132 program 26, 133-151 program 27, 152-170 program 28, 171-189 program 29, 190-208 sound 1, 209-227 sound 2, 228-246 sound 3, 247-255 sound 4. (Channel 1, 2, 3, 4, 6, 7 will not work in this mode. Channel 5 control the speed.)

● SPECIFICATIONS

Rate Voltage: AC85V-265V 50Hz-60Hz (Auto-adjust)

Rate Power: 60W

2


Color: RGBW

Lamp: Super bright, 3W LED lamps


Quantity of Lamp: 18pcs (R6. G4. B4. W4PCS)

N.W.: 1.5kg

Por favor, lea cuidadosamente el manual antes de poner en marcha este efecto LED



● FUNCIONES DEL DISPLAY

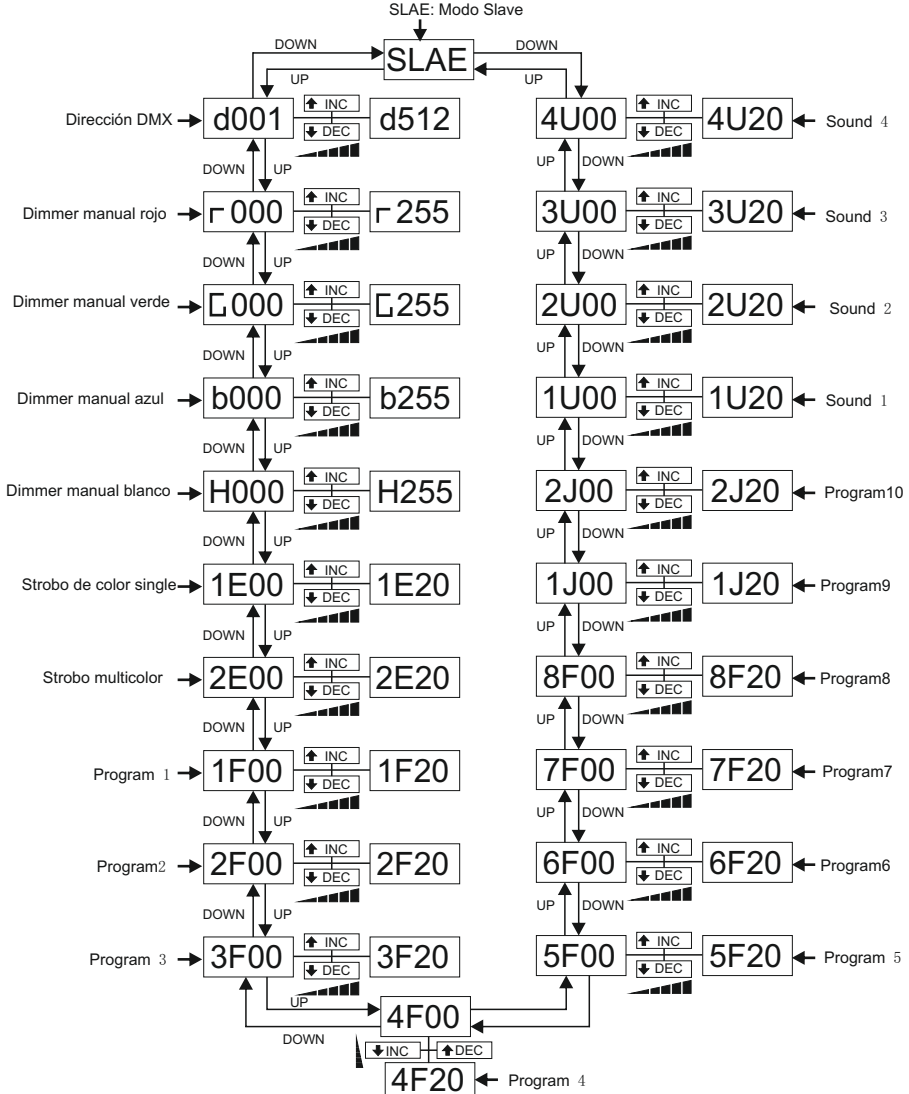

● VALORES DMX Y FUNCIONES

Canal	Valor	Funciones
1	0-255	Dimmer manual rojo 0-100%
2	0-255	Dimmer manual verde 0-100%
3	0-255	Dimmer manual azul 0-100%
4	0-255	Dimmer manual blanco 0-100%
5	0-255	Control de velocidad y strobo
6	0-255	0-16 sin funcion, 17-255 elección de color (Canal 1-4 no funcionan en este modo. Canal 5 controla la velocidad)
7	0-255	1-13 program 1, 14-27 program 2, 28-41 program 3, 42-55 program 4, 56-69 program 5, 70-83 program 6, 84-97 program 7, 98-111 program 8, 112-125 program 9, 126-139 program 10, 140-153 program 11, 154-167 program 12, 168-181 program 13, 182-195 program 14, 196-209 program 15, 210-223 program 16, 224-237 program 17, 238-251 program 18, 252-255 program 19 (Canales 1,2,3,4,6 no funcionan en este modo. Canal 5 controla la velocidad.
8	0-255	1-18 program 20, 19-37 program 21, 38-56 program 22, 57-75 program 23, 76-94 program 24, 95-113 program 25, 114-132 program 26, 133-151 program 27, 152-170 program 28, 171-189 program 29, 190-208 sound 1, 209-227 sound 2, 228-246 sound 3, 247-255 sound 4. (Canales 1,2,3,4,6,7 no funcionan en este modo. Canal 5 controla la velocidad.

● ESPECIFICACIONES

Alimentación: AC85V-265V 50Hz-60Hz (Auto-ajuste)

Potencia: 60W

Color: RGBW

Fuente: LED superbrillantes de 3W c.u.

Cantidad de LEDs: 18pcs(R6. G4. B4. W4)

Peso.: 1.5kg

EQUIPSON, S.A.

**Avda. El Saler, 14 - Pol. Ind. L'Alteró
46460 - Silla (Valencia) Spain**

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42

www.equipson.es / equipson@equipson.es