

DUO-NET PLAYER

MUSIC SOURCES

Dual Streaming & Media Audio Player



PRODUCT OVERVIEW

ECLER DUO-NET PLAYER is a double audio sound source that features full EclerNet compatibility (EclerNet Manager software, UCP control system, WPmSCREEN remote management, TP-NET third party integration protocol, etc.). It includes 2 independent stereo media players, each one being able to play Internet audio streams and local or networked audio media.

DUO-NET PLAYER can be used as a stand-alone media player or integrated as a piece of a full EclerNet system, as well as coexisting with third-party devices.

KEY FEATURES

- 2 independent media players, each one linked to a dedicated stereo output
- Compatible with mp3, ogg, AAC, WAV and FLAC audio formats
- SD and USB slots for local storage media contents
- Ethernet interface (RJ45 connector) for EclerNet and TP-NET control, Internet streaming reception and networked media playback
- Fully programmable and controllable via EclerNet software
- UCP (User Control Panels) remote control system, compatible with WPmSCREEN and third-party client devices (iOS®, Windows® and Android®)
- 4 GPI ports (General Purpose Inputs) to trigger events
- IR remote control for basic end-user control
- Priority media (emergency, advertising, etc.) over program audio


APPLICATIONS

- Audio sound source in A/V corporate, retail and education applications
- BGM & Paging solutions, with message priorities and independent audio source independent selection
- Integration in installation global control systems

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

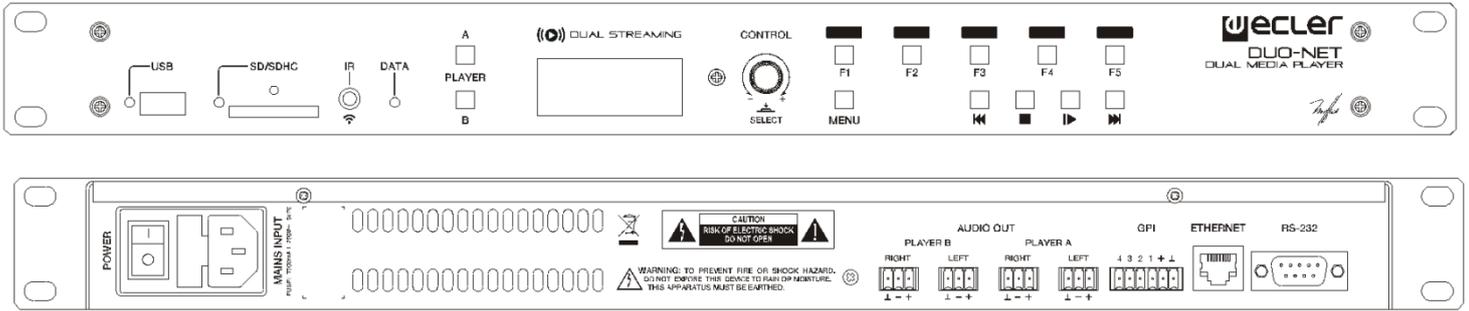

TECHNICAL DATA

ETHERNET	
Connector	RJ45
Speed	10/100Mbps
AUDIO OUTPUT	
Nominal output level	+6dB (balanced) 0db (unbalanced)
Max Output Level/Minimum Load	+12dBV / 5kΩ
Freq. Response	5Hz - 24kHz (-3dB)
Balanced output header	4 x 3 pin terminal block
Output impedance	300Ω
MEDIA PLAYER	
Audio DAC	24bit / 48kHz
Output Noise Floor (FFT)	-100dB (from 20Hz to 20kHz)
THD + Noise	< 0.005% (1kHz, 1Vrms)
Compatible file formats	mp3, ogg, WAV, AAC, FLAC, OPUS
SOURCES	
Network locations (Samba protocol)	
USB content	
SD content	
Internet Radio Streams	
GPI	
Number/input voltage	4 ports / 0 - 10VDC
Output header	6 pin Terminal block
RS232	
SubD female connector 9 pin	TP-net protocol
RTC	
Time and date retention (battery)	240 hours aprox.
RTC accuracy	±1 minute / month
PANEL	
MATRIX DISPLAY	160x64 pixels
Led indicator	USB, SD, NETWORK, PLAYER A/B, F1-F5, PLAY/PAUSE
Direct buttons	ENCODER, F1-F5, MENU, PREV, NEXT, PLAY, STOP, PLAYER A/B

SUPPLY

AC supply mains voltage	90-264VCA 50-60Hz
Power consumption	15VA

MECHANICAL

Dimensions WxHxD	482.6x44x120mm
Weight	1800gr

USB and SD card interfaces

USB host interface	USB 2.0 Full Speed (480 Mbps) Supports mass storage class devices Up to 32GB
---------------------------	------------------------------------------------------------------------------------

Micro SD card interface	Supports SD ver1.0, SDHC
--------------------------------	--------------------------

FAT and files analysis	Supports FAT16, FAT 32 and VFAT Multi-partition up to 1 65354 playable folders 65354 playable folders within each folder 65354 playable files within each folder
-------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Folder hierarchy	Up to 8 containing the root directory
-------------------------	---------------------------------------

Playable extensions	mp3, wav, ogg, aac, flac
----------------------------	--------------------------

Sorting in alphabetical order	UNICODE Up to 100 folders Up to 100 files by folder (Folders/files over 100 sorted in the FAT order)
--------------------------------------	---------------------------------------------------------------------------------------------------------------

ACCESSORIES SUPPLIED

Main power cable, IR remote control unit

Remote control battery	2 x AAA, LR-03 1,5V
-------------------------------	---------------------