


TRAKTOR TSI INSTALLATION INSTRUCTIONS


1. Connect the CMD Device intended to be used with Native Instruments Traktor.
2. Open the **Preferences** menu in Traktor and select **Controller Manager**.




3. Under the **Device Setup** section of **Controller Manager**, click the **Add** button.

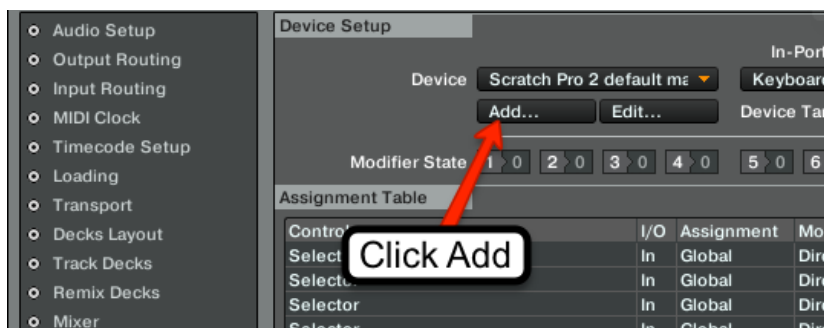

4. Select **Import** from the drop down menu.

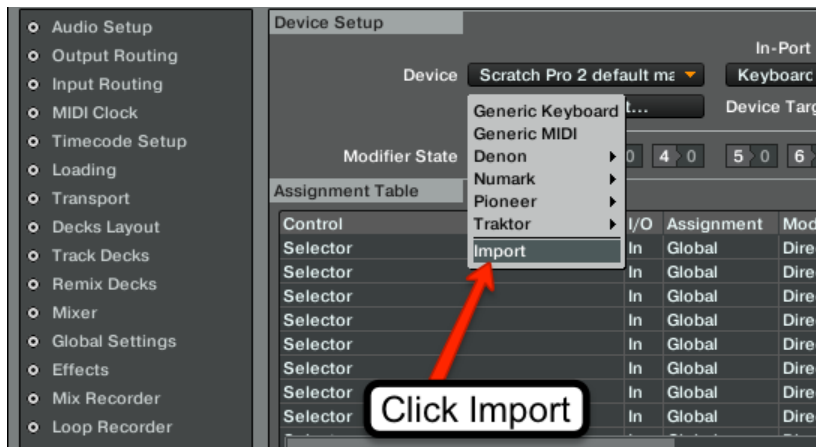

5. Navigate to the location on your computer where the TSI file is stored and **Open** the file.

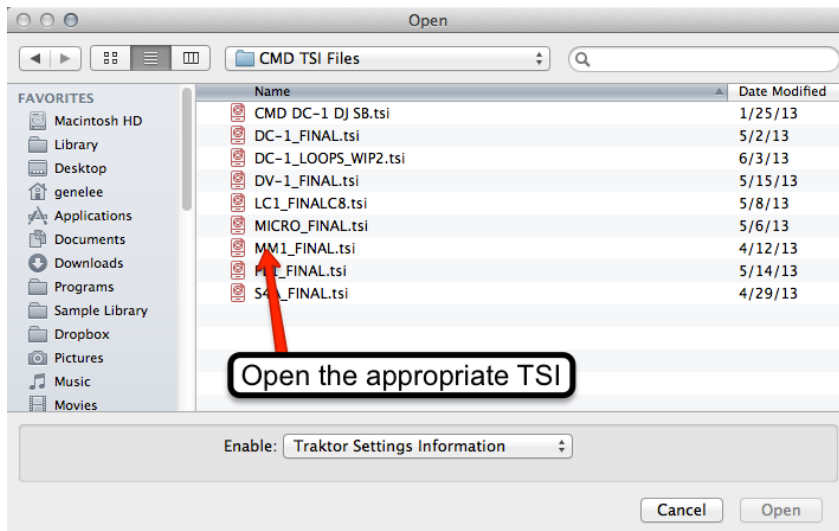

6. Once the TSI has loaded, look at the **In-Port** and **Out-Port** settings. Make sure the controller you are using is selected for both.



7. If you are experiencing difficulties, check the ***In-Port/Out-Port*** settings for other devices that are installed. Verify the device has not been selected for any other controllers you are using. Also, look at other devices which are using the ***All-Ports*** configuration. This will cause a conflict with the two devices.