



# **SUPERMULTIPAR LED 108/3**


**36 X 3W LEDs (3 in 1)**

**User Manual/Manual de Uso**


Ver. 0119



Please read this manual carefully before operating the LED light.

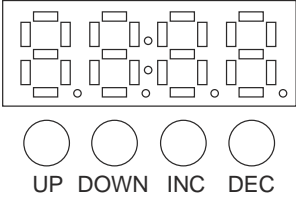

● LED DISPLAY FUNCTIONS

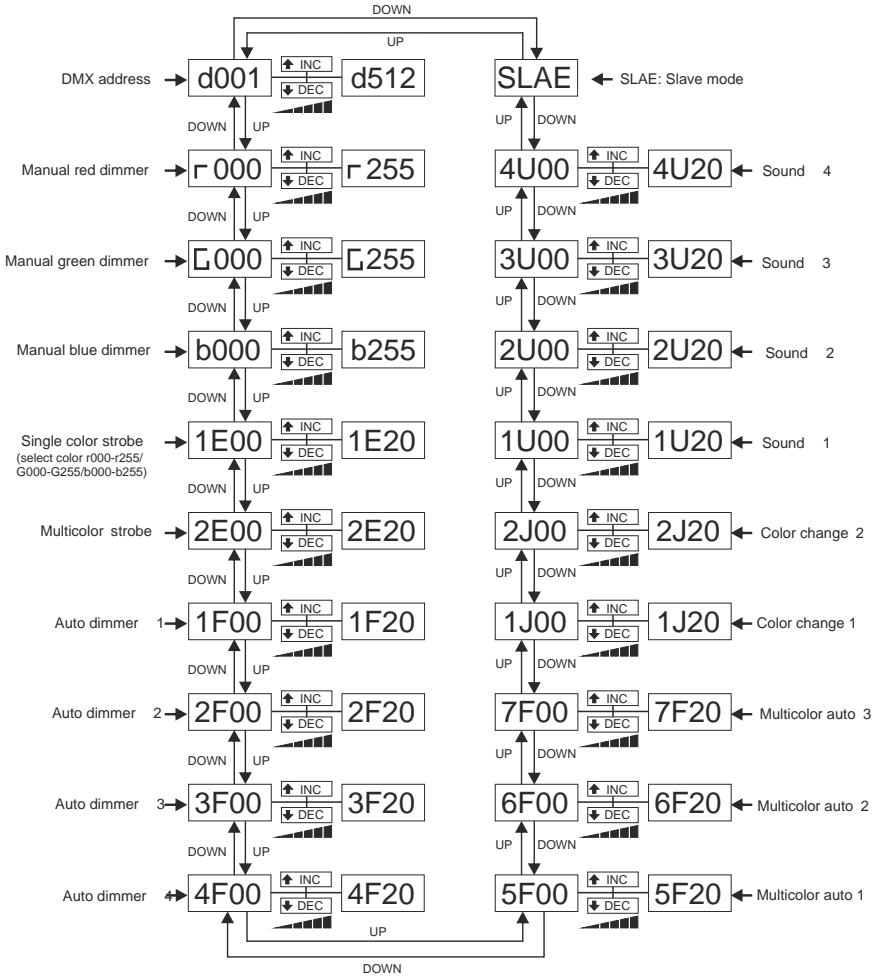

## ● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	manual red dimmer 0-100%
2	0-255	manual green dimmer 0-100%
3	0-255	manual blue dimmer 0-100%
4	0-255	0-27 no function 28-55 single color strobe ( channel 1/2/3 control the color, channel 6 control the speed) 56-83 multicolor strobe ( channel 1/2/3 on top value, channel 6 control the speed) 84-255 choose the color
5	0-255	1-90 single color dimmer 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto2 195-207 multicolor auto3 208-220 sound1 221-233 sound2 234-246 sound3 247-255 sound4 (channel1-4 will not work in this mode. Channel 6 control the speed)
6	0-255	Control the speed
7	0-255	General dimmer

## ● SPECIFICATIONS

Rate Voltage: AC100V-240V 50Hz-60Hz

Rate Power:120W


Lamp:Super bright, 3 in 1 LED Lamps

Quantity of Lamp: 36pcs (3W each)


N.W.:4.5kg



Por favor, lea este manual cuidadosamente antes de hacer funcionar este proyector LED.



### ● FUNCIONES DEL DISPLAY

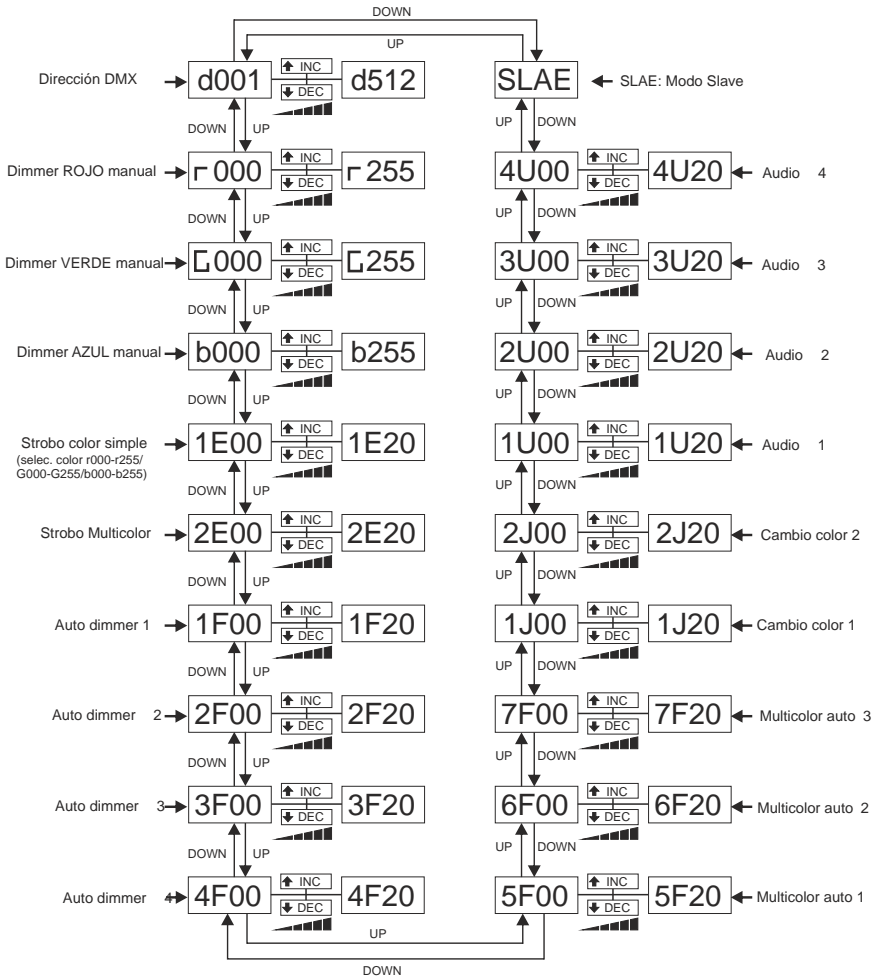

## ● VALORES DMX Y FUNCIONES

Canales	Valores	Functions
1	0-255	Dimmer rojo manual 0-100%
2	0-255	Dimmer verde manual 0-100%
3	0-255	Dimmer azul manual 0-100%
4	0-255	0-27 sin función 28-55 strobo color simple ( canales 1/2/3 controlan el color, canal 6 controla la velocidad) 56-83 strobo multicolor ( canales 1/2/3 al valor máximo canal 6 controla la velocidad) 84-255 elige el color
5	0-255	1-90 dimmer color sencillo 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto 2 195-207 multicolor auto 3 208-220 audio 1 221-233 audio 2 234-246 audio 3 247-255 audio 4 (canales 1-4 no funcionan en este modo. canal 6 controla la velocidad)
6	0-255	Controla la velocidad
7	0-255	Dimmer general

## ● ESPECIFICACIONES

Alimentación: AC100V-240V 50Hz-60Hz

Consumo: 120W

Color: RGB

LEDs: LEDs 3 en 1 superbrillantes

Cantidad de LEDs: 36 LEDs (3W cada uno)

Peso.: 4.5kg





**EQUIPSON, S.A.**

Avda. El Saler, 14 - Pol. Ind. L'Alteró  
46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42  
[www.equipson.es](http://www.equipson.es) /[equipson@equipson.es](mailto:equipson@equipson.es)