

UB2222FX-PRO

EURORACK

Technical Specifications



Version 1.3 February 2006



www.behringer.com

EURORACK UB2222FX-PRO

EURORACK


Ultra Low-Noise Design 22-Input 2/2-Bus Mic/Line Mixer with Premium Mic Preamplifiers and 24-Bit Multi-FX Processor



- ▲ Ultra low-noise ULN design, highest possible headroom, ultra-transparent audio
- ▲ 8 new state-of-the-art, studio-grade IMP “Invisible” Mic Preamps with:
 - 130 dB dynamic range for 24-bit, 192 kHz sampling rate inputs
 - Ultra-wide 60 dB gain range
 - Lowest possible distortion 0.0007% (20 Hz - 20 kHz)
- ▲ Studio-grade 24-bit stereo FX processor with 100 awesome presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects
- ▲ Effective, extremely musical 3-band EQ with semi-parametric mid band plus switchable low-cut filter on all mono channels
- ▲ Inserts on each mono channel for flexible connection of outboard equipment
- ▲ 16 balanced high-headroom line inputs with +4/-10 level selection on stereo channels
- ▲ State-of-the-art 4580 operational amplifiers provide lowest noise and distortion—better than 4560 op amps
- ▲ 3 aux sends per channel: 1 pre fader for monitoring, 1 pre/post fader switchable for monitoring/FX applications, 1 post fader (for internal FX or as external send)
- ▲ Peak LEDs, mute, main mix and subgroup routing switches, solo and PFL functions on all channels
- ▲ 2 subgroups with separate outputs for added routing flexibility
- ▲ 3 multi-functional stereo aux returns with flexible routing
- ▲ Balanced main mix outputs with TRS and gold-plated XLR connectors, separate control room, headphones and stereo tape outputs
- ▲ Control room/phones outputs with multi-input source matrix
- ▲ Tape inputs assignable to main mix or control room/phones outputs
- ▲ Switchable +48 V phantom power for condenser microphones
- ▲ Long-wearing 60 mm logarithmic-taper faders and sealed rotary controls
- ▲ Internal switch-mode power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response plus lowest possible power consumption for energy saving
- ▲ Rack mount brackets included
- ▲ High-quality components and exceptionally rugged construction ensure long life
- ▲ Conceived and designed by BEHRINGER Germany

EURORACK UB222FX-PRO

BLOCK DIAGRAM

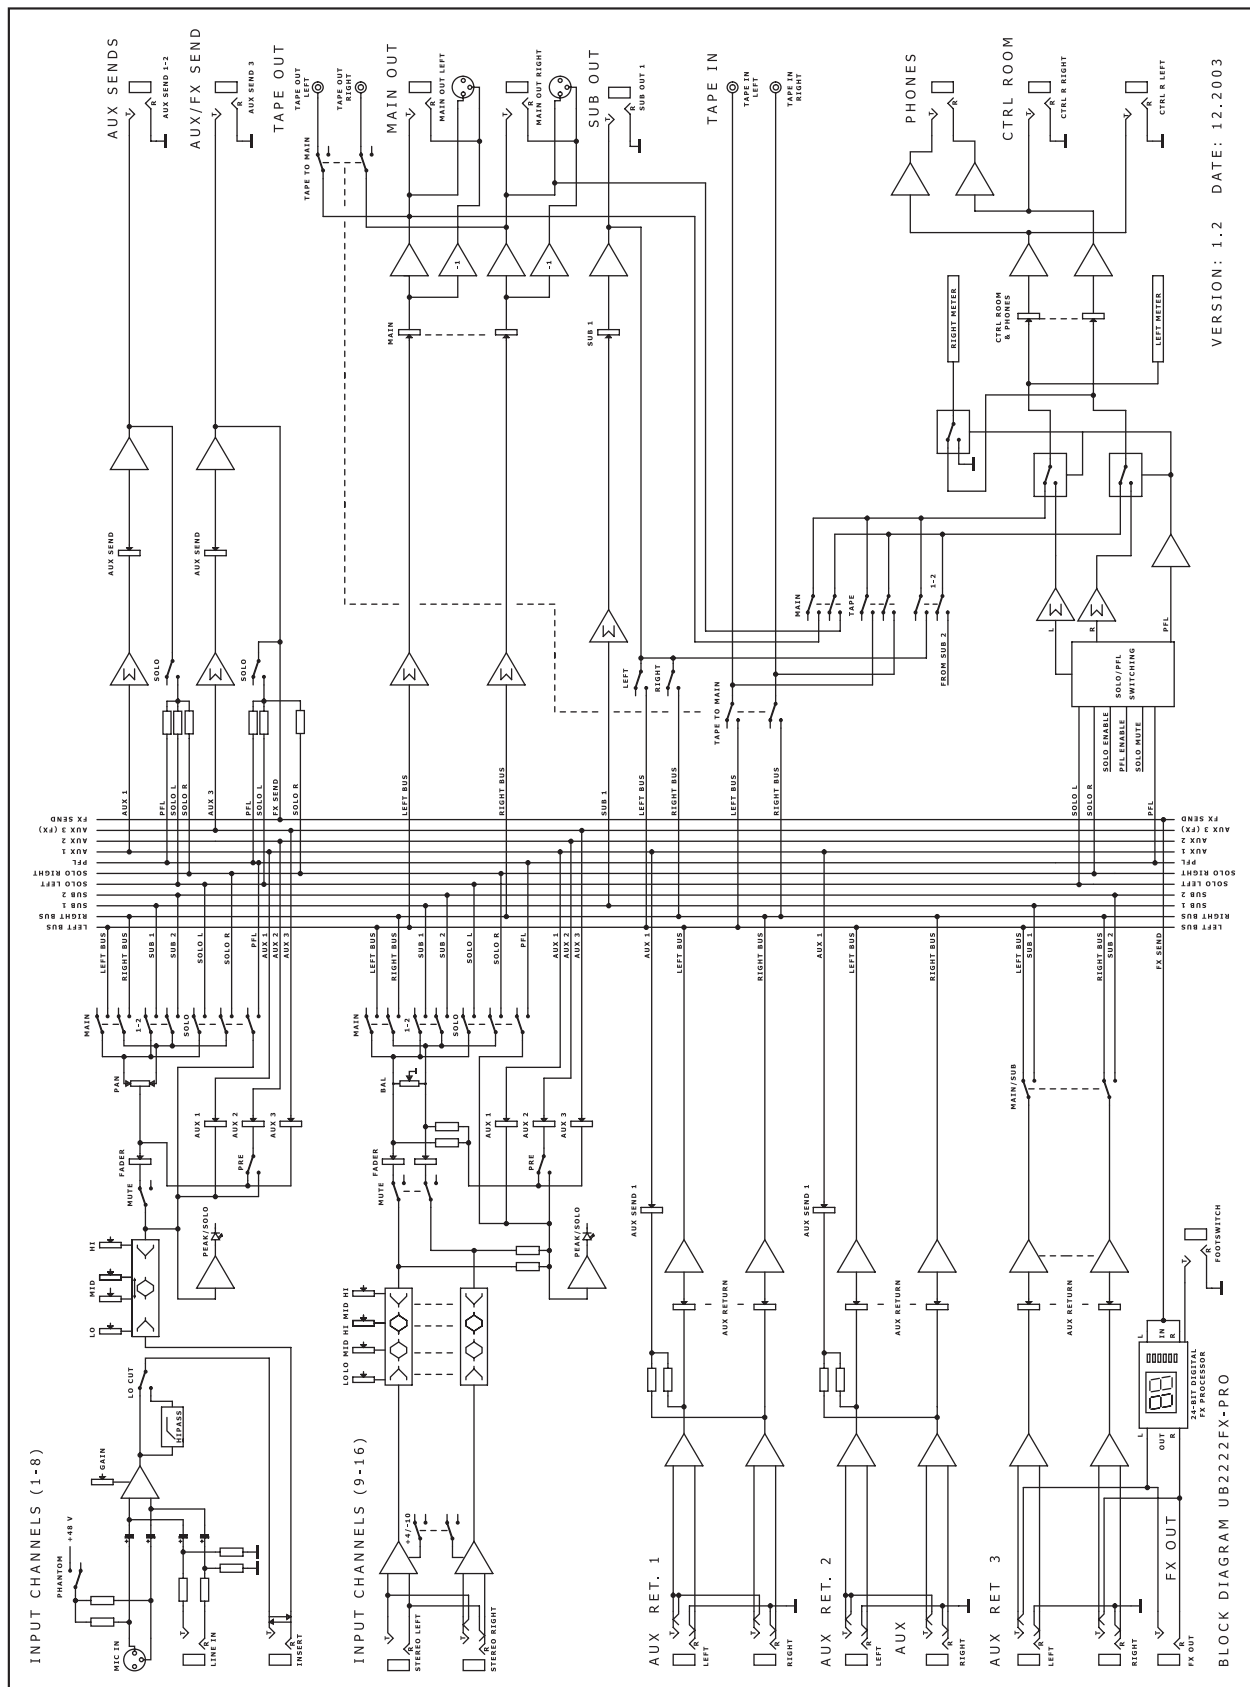

EURORACK UB2222FX-PRO

SPECIFICATIONS

Microphone inputs (IMP Invisible Mic Preamp)

Type	XLR, electronically balanced, discrete input circuit
Mic E.I.N. (20 Hz - 20 kHz)	
@ 0 Ω source resistance	-134 dB / 135.7 dB A-weighted
@ 50 Ω source resistance	-131 dB / 133.3 dB A-weighted
@ 150 Ω source resistance	-129 dB / 130.5 dB A-weighted

Frequency response	<10 Hz - 150 kHz (-1 dB), <10 Hz - 200 kHz (-3 dB)
--------------------	---

Gain range	+10 to +60 dB
Max. input level	+12 dBu @ +10 dB Gain
Impedance	approx. 2.6 k Ω balanced
Signal-to-noise ratio	110 dB / 112 dB A-weighted (0 dBu In @ +22 dB gain)

Distortion (THD+N)	0.005% / 0.004% A-weighted
--------------------	----------------------------

Line input

Type	1/4" TRS connector electronically balanced
Impedance	approx. 20 k Ω balanced 10 k Ω unbalanced
Gain range	-10 to +40 dB
Max. input level	+22 dBu @ 0 dB Gain

Fade-out attenuation¹ (Crosstalk attenuation)

Main fader closed	90 dB
Channel muted	89 dB
Channel fader closed	89 dB

Frequency response

Microphone input to main out	
<10 Hz - 90 kHz	+0 dB / -1 dB
<10 Hz - 160 kHz	+0 dB / -3 dB

Stereo inputs

Type	1/4" TRS connector, electronically balanced
Impedance	approx. 20 k Ω
Max. input level	+22 dBu

EQ mono channels

Low	80 Hz / ± 15 dB
Mid	100 Hz - 8 kHz / ± 15 dB
High	12 kHz / ± 15 dB

EQ stereo channels

Low	80 Hz / ± 15 dB
Low Mid	500 Hz / ± 15 dB
High Mid	3 kHz / ± 15 dB
High	12 kHz / ± 15 dB

Aux sends

Type	1/4" TS connector, unbalanced
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Stereo aux returns

Type	1/4" TRS connector, electronically balanced
Impedance	approx. 20 k Ω bal. / 10 k Ω unbal.
Max. input level	+22 dBu

Main outputs

Type	XLR, electronically balanced and 1/4" TRS balanced
Impedance	approx. 240 Ω balanced / 120 Ω unbalanced
Max. output level	+28 dBu

Control room outputs

Type	1/4" TS connector unbalanced
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Headphones outputs

Type	1/4" TRS connector, unbalanced
Max. output level	+19 dBu / 150 Ω (+25 dBm)

DSP

Converter	24-bit 24-bit Sigma-Delta, 64/128-times oversampling
Sampling rate	40 kHz

Main mix system data²

Noise	
Main mix @ $-\infty$	
Channel fader @ $-\infty$	-101 dB
Main mix @ 0 dB,	
Channel fader @ $-\infty$	-93 dB
Main mix @ 0 dB,	
Channel fader @ 0 dB	-81 dB

Power supply

Mains voltage	100 to 240 V~, 50/60 Hz
Power consumption	46 W
Fuse	100 - 240 V~: T 1.6 A H 250 V
Mains connection	Standard IEC receptacle

Physical/weight

Dimensions (H x W x D)	approx. 3 7/8" x 16 1/16" x 14 1/16" (97 mm x 408 mm x 367 mm)
Weight (net)	approx. 4.8 kg

Measuring conditions:

- 1 kHz rel. to 0 dBu; 20 Hz - 20 kHz; line input; main output; unity gain.
- 20 Hz - 20 kHz; measured at main output. Channels 1 - 4 unity gain; EQ flat; all channels on main mix; channels 1/3 as far left as possible, channels 2/4 as far right as possible. Reference = +6 dBu.

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

EURORACK UB2222FX-PRO

GB

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH. BEHRINGER® is a registered trademark.

ALL RIGHTS RESERVED. © 2006 BEHRINGER Spezielle Studiotechnik GmbH,
Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany.
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903
